



U.S.A.



4-13-01  
M

INVESTOR IN PEOPLE

The Patent Office  
Concept House  
Cardiff Road  
Newport  
South Wales  
NP10 8QQ



I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.


Re-registration under the Companies Act does not constitute a new legal entity but merely affects the company to certain additional company law rules.


**CERTIFIED COPY OF  
PRIORITY DOCUMENT**

Signed

Dated

29 JUN 2000

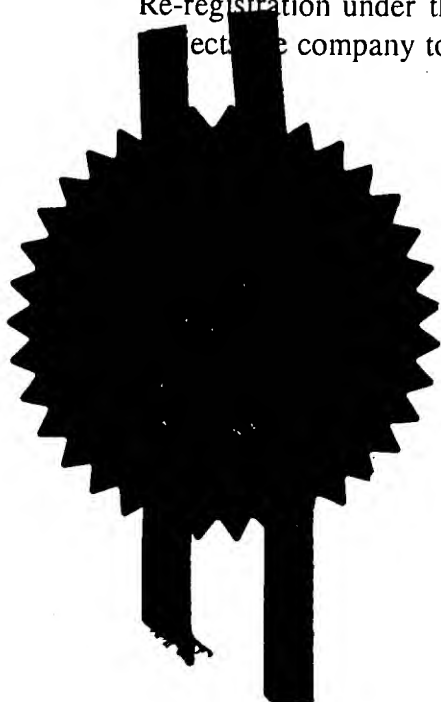

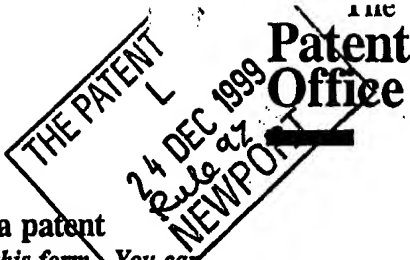

1/77

05JAN00 E502471-3 002879  
P01/7700 0.00-9930851.2

Request for grant of a patent  
(See notes on the back of this form. You can  
also get an explanatory leaflet from the Patent  
Office to help you fill in this form)

The Patent Office  
Cardiff Road  
Newport  
Gwent NP9 1RH

1. Your reference PHB 34441

2. Patent application number 24 DEC 1999 9930851.2  
(The Patent Office will fill in this part)

3. Full name, address and postcode of the or of each applicant (underline all surnames)  
KONINKLIJKE PHILIPS ELECTRONICS N.V.  
GROENEWOUDSEWEG 1  
5621 BA EINDHOVEN  
THE NETHERLANDS

Patents ADP Number (if you know it)

If the applicant is a corporate body, give the country/state of its incorporation

THE NETHERLANDS

741929400

4. Title of the invention APPARATUS CONTROL SYSTEM AND METHOD

5. Name of your agent (if you have one) ANDREW GORDON WHITE  
"Address for service" in the United Kingdom Philips Corporate Intellectual Property  
to which all correspondence should be sent Cross Oak Lane  
(including the postcode) Redhill  
Surrey

RH1 5HA

Patents ADP number (if you know it)

7133473002

6. If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or of each of these earlier applications and (if you know it) the or each application number

Country	Priority Application number (if you know it)	Date of filing (day/month/year)
---------	---	------------------------------------

7. If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application

Number of earlier application	Date of filing (day/month/year)
-------------------------------	------------------------------------

8. Is a statement of inventorship and of right to grant of a patent required in support of this request? (Answer "Yes" if:

a) any applicant named in part 3 is not an inventor, or

b) there is an inventor who is not named as an applicant, or

c) any named applicant is a corporate body.

See note (d))

YES

9. Enter the number of sheets for any of the following items you are filing with this form.

Do not count copies of the same document.

Continuation sheets of this form

Description	11 (x2)
Claims(s)	4 (x2)
Abstract	1 (x2)
Drawings	3 (x2)

10. If you are also filing any of the following, state how many against each item:

Priority Documents

Translations of priority documents

Statement of inventorship and right  
to grant of a patent (*Patents Form 7/77*)


Request for preliminary examination and  
search (*Patents Form 9/77*)

Request for substantive examination  
(*Patents Form 10/77*)

Any other documents  
(*Please specify*)

11. I/We request the grant of a patent on the basis of this application.

Signature



Date

23/12/99

12. Name and daytime telephone number of  
person to contact in the United Kingdom

01293 815299

(A. G. WHITE)

Warning

After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.

Notes

- If you need help to fill in this form or you have any questions, please contact the Patent Office on 0645 500505.
- Write your answers in capital letters using black ink or you may type them.
- If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.
- If you have answered "Yes" *Patents Form 7/77* will need to be filed.
- Once you have filled in the form you must remember to sign and date it.
- For details of the fee and ways to pay please contact the Patent Office

## DESCRIPTION

**APPARATUS CONTROL SYSTEM AND METHOD**

5           The present invention relates to apparatus control systems, in particular the present invention relates to user interfaces for mobile telephones.

          Features offered by computer and telephony apparatus are rapidly converging. A cheap home computer is now capable of interaction with the outside world, in particular, by enabling access to the Internet and the World-  
10       Wide Web (WWW), whilst telephones are now beginning to offer similar connectivity to the outside world.

          Current moves to increase the functionality that mobile telephones offer include the introduction of WWW access. Whilst User Interface (UI) components used by the browser are likely to be similar to those used in the UI  
15       to control the telephone, the look-and-feel perceived by the user is not guaranteed to be equivalent, which is not good usability practice. However, the memory and computer processor resources typically available in a mobile telephone are limited due to cost, size and weight considerations. In order to  
20       make the best use of the limited resources, a specific UI is implemented for each mobile telephone type. This is often done at machine code level to take best advantage of available resources. By tailoring the UI application, the programmer can implement the UI to take advantage of any features the telephone has whilst avoiding redundant code and features that a generic UI  
25       would require in order to support differing mobile telephone models with differing feature sets and code bases. Major disadvantages of tailored UI applications include: the time and cost to develop the UI application each time a new telephone is developed; the overheads in maintaining and updating each UI application to fix bugs or support additional telephone hardware or  
30       telephone network features; and, the individuality of each UI application given that a programmer's style normally impacts on the operation and appearance

of the UI thereby resulting in differences in UI's in different mobile telephone types.

The WWW has evolved and unified to the extent that there are now well defined open standards for client-server communication (typically using the  
5 HyperText Transport Protocol, HTTP), page format (primarily HyperText Markup Language, HTML, or an improvement thereon) and underlying functionality (commonly implemented in Java, JavaScript, VBScript or Active Server Pages). Interactive features of the WWW such as links between pages are commonly implemented to have the same appearance across the WWW  
10 due to user expectations of how the link should appear (normally a button or underlined Universal Resource Locator (URL) address). However, the WWW was primarily intended for full-scale computers, such as PC's, with ample memory, fast processor, a permanent storage capacity and keyboard/mouse-type input devices. WWW browsers implemented to permit users of PC's to  
15 access the WWW are commonly resource hungry and push the resources of many older PC's to the limit. In order to enable users to access the WWW via mobile telephones with their limited display area, memory and processors, a new type of browser (known as a micro-browser) has been developed specifically to run on small devices like mobile telephones. Compared to  
20 fourth-generation browsers (like Netscape v4), micro-browsers have reduced capabilities and functionality and are written to transparently interface and use existing mobile telephone features to access the WWW using the mobile telephone's input device and limiting overall power consumption.

The connection to the WWW using the mobile telephone presents a  
25 further problem in that wireless data networks tend to have less available bandwidth, more latency, less connection stability and less predictable availability. Designed with these characteristics in mind, new transport protocols have been developed to enable communication between the mobile device and the network. One of the first protocols, HDTP (developed by  
30 Unwired Planet), is still in use alongside newer technology specified by the WAP Forum. To enable the mobile device to access WWW-content, a gateway exists at the mobile telephone provider's receiver which

encodes/decodes HTTP traffic into HDTP/WAP traffic and vice-versa. The micro-browsers implemented to support these protocols have similar limitations to the UI applications in that the micro-browser must be adapted for each new mobile telephone type in order to run on the telephone and to be able to control the mobile telephone to make connections to the gateway and transmit and receive data.

Whilst attempts have been made to implement a UI which operates as a micro-browser as well, the micro-browser becomes tied to the mobile telephone type in the same way as the UI applications are. Furthermore, the above protocols were not intended to be used to communicate with the rest of the mobile telephone, being unable to generate HDML pages dynamically, support animations or respond to asynchronous events such as incoming calls.

According to one aspect of the present invention, there is provided a system for controlling an apparatus having a dedicated user interface, parts of the dedicated user interface communicating with each other using a dedicated user interface message protocol, the system comprising a browser adapted to display a generic user interface, to issue requests due to user interaction with the generic user interface and to accept notifications comprising data or events, and a translation system configured to receive issued requests, to translate the requests and to communicate them using the dedicated user interface message protocol to one of the parts of the dedicated user interface, and to receive communications from the parts of the dedicated user interface using the dedicated user interface message protocol, to translate the communication into notifications and to pass them to the browser.

By overlying a browser-based user interface on an existing interface, existing web command structure, technology and, most importantly, look and feel can be used to provide generic user interfaces. An important aspect of the present invention is that the existing user interface remains hidden under the browser meaning that a browser-based user interface need not be specifically written for each telephone type, the browser need only be adapted to communicate with the existing user interface.

The browser preferably includes a communications handler configured to accept notifications comprising data or events and to issue the requests due to user interaction with the generic user interface, wherein the communications handler determines the request type and if the request relates to World Wide Web browsing the communications handler transmits the request to a World Wide Web server, otherwise the communications handler passes the request to the translation system.

The browser is preferably a World Wide Web micro-browser.

The browser may be an HDML micro browser.

Requests issued due to user interaction with the generic user interface may comprise HDML "Get" messages.

Requests relating to the generic user interface may comprise applicative messages embedded within the HDML Get messages.

The translation system is preferably configured to retrieve the applicative message from the HDML Get messages, attach it to an electronic delivery envelope determined in dependence on the type of the applicative message in accordance with the dedicated user interface message protocol and to communicate it to one of the parts of the dedicated user interface.

Notifications may comprise HDML "x-up-notify" messages.

Notifications relating to the generic user interface may comprise applicative messages embedded within the HDML x-up-notify messages.

A received communication from the parts of the dedicated user interface may comprise one or more applicative messages attached to an electronic delivery envelope in accordance with the dedicated user interface message protocol, wherein the translation system is configured to retrieve the applicative message(s), embed them within an x-up-notify message and pass the message to the communications handler.

The communications handler preferably includes a page generator, wherein the communications handler passes received x-up-notify messages to the page generator which, in dependence on the embedded applicative message(s), generates an HDML page and passes the HDML page within an x-up-notify message to the browser for action.

Preferably, the apparatus comprises a mobile telephone.

Figure 1 is a schematic diagram of a mobile telephone control system according to the present invention;

5        Figure 2 is a schematic diagram of a specific embodiment of a mobile telephone control system in accordance with an aspect of the present invention;

Figure 3 is a detailed schematic diagram of parts of the system of Figure 2;

10       Figure 4 is a diagram of messages used by the mobile telephone control system of Figures 2 and 3; and

Figure 5 is a schematic diagram of a page generator for use in the present invention.

15       Figure 1 is a schematic diagram of a mobile telephone control system according to the present invention. A mobile telephone 10 includes an embedded user interface 20 for controlling features of the telephone and for interaction with the user via a display area 30 and an input device 40. A micro-browser 50 is implemented transparently to the user interface 20 enabling the  
20       user to access the WWW. A translation unit 60 interfaces the micro-browser 50 to the user interface 20. A user controls the mobile telephone by entering commands via the micro-browser 50. The micro-browser 50 is used for all user interaction including tasks such as accessing an address book, making a  
25       telephone call or accessing the World Wide Web. Micro-browser commands are processed by the translation unit and translated into corresponding user interface commands. Vice-versa, events generated by the mobile telephone 10, such as incoming calls, SMS messages or received WWW pages, are notified by the user interface 20 to the translation unit 60. The events are processed by the translation unit 60 and translated into corresponding micro-  
30       browser events which are passed to the micro-browser 50.

Figure 2 is a schematic diagram of a specific embodiment of a mobile telephone control system in accordance with the present invention. The mobile



telephone 10 is a Philips Spark mobile telephone which has a user interface 20 defined by an APPI (Application Interface) Message Protocol. Applications running on the telephone communicate with and control the telephone by sending APPI applicative messages to the APPI. Vice-versa, the mobile  
5 telephone communicates with applications by sending applicative messages from the APPI to the applications.

A micro-browser 50 implemented using the HDML protocol runs on the mobile telephone 10. Messages, requests and events are passed between the translation unit 60 and the user interface using applicative messages. In  
10 this manner, each time the browser 50, or any other on-phone application, needs to communicate with the telephone 10, an applicative message is sent by the translation unit 60 across the APPI. Using an optional feature of applicative messages, data is associated with the messages sent.

Communication between the micro-browser 50 and the translation unit  
15 60 is performed using x-up-notify messages 100 from the translation unit 60 to the micro-browser 50 and get request messages 120 from the micro-browser 50 to the translation unit 60. The two message types are defined in the HDTP protocol and are discussed further below with reference to Figure 3.

The micro-browser 50 includes a communications handler 200,  
20 responsible for transmission and reception of data for the micro-browser 50, and an HDML interpreter 205, responsible for user interaction with WWW pages on the micro-browser 50 and issuing commands/requests due to user interaction. When the micro-browser 50 needs to send events or requests to the WWW server (not shown), such as when a WWW page is requested by a  
25 user, a Get request message is passed to the translation unit 60. A Get request message is a PDU (protocol data unit) analogous to the HTTP GET method. The message instructs the WWW server to get whatever information is associated with a given URL. The HDML interpreter 205 assembles the Get request, including the URL of the requested page, and passes it to the  
30 communications handler 200. The communications handler identifies the standard HDTP Get format and transmits it to the WWW server.

If, however, the event or request is not a simple request for a WWW page corresponding to a URL, data associated with the event or request is embedded inside a Get request. For example, a WWW page may be embedded in the micro-browser 50 allowing the user to enter telephone numbers and/or select them from a WWW based telephone book and dial via the micro-browser 50. On entering the number, an HDML card (an HDML micro-browser's version of an HTML page) containing the telephone number entered as one or more applicative message is held within the cache of the HDML micro-browser 50. When the user chooses to call the number by, for example, clicking a call button on the page, the HDML card is read by the HDML micro-browser's interpreter 205 which embeds the applicative message(s) into a Get request and passes it to the communications handler 200 for further action. If, as in the present case, the communications handler 200 determines that the Get request contains an applicative message and should therefore not be transmitted to the WWW server, it passes it to the translation unit 60. The translation unit 60 processes the Get request and transmits across the APPI.

Examples of applicative messages to be transmitted across the APPI may include:

- APPI\_call\_setup\_req - after manually entering a telephone number from the telephone's idle state, a user's request to call that number results in this message being formatted and transmitted across the APPI;
- APPI\_dir\_delete\_req - When browsing through messages, the user is presented with an on-screen menu. Should he select delete, this message is formatted and transmitted across the APPI to perform the required action.
- When trying to change the ringer type, the user navigates through the list of possible ringer types listening to each ringer as it is selected. In this instance, APPI messages are transmitted in order to play the next ringer type and also to set the ringer type once selected.

As all browser generated applicative messages are transmitted upon a keypress or menu selection from an HDML card, all information required to form the applicative message is embedded inside the respective HDML card. In order to adapt HDML to allow storage of this information, the following tags have been expanded: CE and ACTION, relating respectively to data used to generate a choice entry in a menu and data associating actions with keypresses. A command identifier (such as APPI\_call\_setup\_req) and data arguments (such as a telephone number) necessary to cause the telephone to perform the desired action are added to the above tags.

When the translation unit 60 is passed a Get message for transmission across the APPI, it reads the applicative message content from the Get message and adds an appropriate envelope so that the APPI message will reach the intended destination. Once the envelope is added, the APPI message is complete and is transmitted across the APPI triggering actions and events at the destination according to the applicative message's content. In preparing an envelope for an applicative message for transmission across the APPI, the following fields are determined and added to the message:

- length of message (total length of APPI in bytes)
- origination address (address of the sender of the APPI message)
- destination address (address of the recipient of the message - this is determined by applicative message's identification field).

The format and an example of an enveloped applicative message is shown in Figure 4.

On-telephone applications communicate via APPI messages by forming the necessary applicative message, packaging it up in an envelope and transmitting it across the APPI. Events generated at the mobile telephone 10, such as incoming calls, SMS messages or battery warnings are transmitted across the APPI as applicative messages and are intercepted by the translation unit 60. Each event is translated into an x-up-notify message which is the means by which HDTP transmits data as and when it becomes available, i.e. not in response to a request made (known as the push model). The message is then passed to the micro-browser's communications handler

module. Each message received by the communications handler needs to be transformed into an appropriate HDML deck to cause the appropriate events to occur in the micro-browser, for example display a prompt on screen and/or to play a sound file. The content of the received message is processed according to the system of Figure 5.

Figure 5 is a schematic diagram of a page generator for use in the present invention. Messages are passed from the translation unit 60 to the communications handler 200. The communications handler 200 processes the message to determine whether it relates to an event generated at the mobile telephone 10 or it contains a received HDML page. If the message contains a received HDML page it is written to the micro-browser's cache 210 for subsequent display. If it is determined that the message relates to an event, in order to generate an appropriate HDML card corresponding to the message, the communications handler 200 passes the message to a page generator 220. For each message type, the page generator runs an associated script 230. The script accesses a database 240 which stores command words that may be included in the event messages. For each command word, the corresponding HDML tag(s) are also stored. The script 230 translates each command word into the corresponding HDML tag(s) and creates an appropriate HDML card. Actions performed by a script are largely dictated by the type and content of the applicative message: for example, an APPI\_ss\_usdd\_ind applicative message contains a string of characters to be displayed on screen and requires only to be added to a card and formatted. However, some applicative messages contain no meaningful content and therefore need to be interpreted. For example, having edited a record in a telephone book application, the APPI\_param\_save\_cnf message is sent to the browser indicating the edited record has been saved correctly. This message is translated by the script to trigger an on-screen message that the record was saved. Once the HDML card is generated, the page generator 220 passes it inside an x-up-notify message to the communications handler 200 which writes the message to the micro-browser's cache 210 for subsequent display or action by the micro-browser.

Further areas of standard UI's not intrinsically supported, or supported to too limited a level, by micro-browsers are audio menus, Idle state handling and Image handling. Audio menus are UI features where audio associated with a menu item is played when browsing the menu. A particular feature of audio menus is that the audio is played until a new item in the menu is selected or the current menu option is selected. This is done by extending the CHOICE tag of HDML cards to include a new, non mandatory, boolean argument `audio_menu` which is False by default but True when the choice card is being used to represent an audio menu. An applicative message instructs the telephone to play the particular audio associated with the tag when it is selected and stops the audio if another tag is selected or the current tag is selected. A mobile telephone is in an idle state when switched on and standing by to receive an incoming call or user input. Normally, when in an idle state the date, time and name of service provider is displayed. This could be done using an HDML display-type card. However, display-type cards cannot capture user input. In order to overcome this without resulting to entry-type cards with their associated prompts, the DISPLAY tag is extended to include a boolean argument called `idle_state`. If this argument is True, a keypress causes a transition from the display card to an entry card allowing the user to enter a telephone number to be dialed etc. Finally, the HDML IMG tag is extended to include `halign` and `valign` (horizontal alignment and vertical alignment respectively) arguments allowing control of an image's position on screen.

It is preferred that APPI messages from on-phone applications are intercepted by the translation unit which continuously monitors the APPI. However, the applications could be rewritten and explicitly told to direct certain message types across the APPI to the translation unit.

Whilst the above description has been primarily concerned with mobile telephones, the present invention is also applicable for enabling micro-browsers to be used as user-interfaces for other devices such as remote controls, personal data assistants, machinery used on a factory floor or even household appliances such as video recorders, microwave ovens and other

control systems. Equally, the principles of the present invention are applicable to many data transmission and display protocols such as WAP (in particular WMLscript-WAP's Scripting language) and should not be limited to HDML.

## Claims

1. A system for controlling an apparatus having a dedicated user interface, parts of the dedicated user interface communicating with each other using a  
5 dedicated user interface message protocol, the system comprising a browser adapted to display a generic user interface, to issue requests due to user interaction with the generic user interface and to accept notifications comprising data or events, and a translation system configured to receive  
10 issued requests, to translate the requests and to communicate them using the dedicated user interface message protocol to one of the parts of the dedicated user interface, and to receive communications from the parts of the dedicated user interface using the dedicated user interface message protocol, to translate the communications into notifications and to pass them to the browser.  
15
2. A system according to claim 1, in which the browser includes a communications handler configured to accept notifications comprising data or events and to issue the requests due to user interaction with the generic user interface, wherein the communications handler determines the request type  
20 and if the request relates to World Wide Web browsing the communications handler transmits the request to a World Wide Web server, otherwise the communications handler passes the request to the translation system.
3. A system according to claim 2, in which the browser is a World Wide  
25 Web micro-browser.
4. A system according to claim 3, in which the browser is an HDML micro browser.
- 30 5. A system according to claim 4, in which requests issued due to user interaction with the generic user interface comprise HDML Get messages.

6. A system according to claim 5, in which requests relating to the generic user interface comprise applicative messages embedded within the HDML Get messages.

5 7. A system according to claim 6, in which the translation system is configured to retrieve the applicative message from the HDML Get messages, attach it to an electronic delivery envelope determined in dependence on the type of the applicative message in accordance with the dedicated user interface message protocol and to communicate it to one of the parts of the  
10 dedicated user interface.

8. A system according to any of claims 4 to 7, in which notifications comprise HDML x-up-notify messages.

15 9. A system according to claim 8, in which notifications relating to the generic user interface comprise applicative messages embedded within the HDML x-up-notify messages.

10. A system according to claim 9, in which a received communication from  
20 the parts of the dedicated user interface comprise one or more applicative messages attached to an electronic delivery envelope in accordance with the dedicated user interface message protocol, wherein the translation system is configured to retrieve the applicative message(s), embed them within an x-up-notify message and pass the message to the communications handler.

25 11. A system according to claim 10, in which the communications handler includes a page generator, wherein the communications handler passes received x-up-notify messages to the page generator which, in dependence on the embedded applicative message(s) generates an HDML page and passes  
30 the HDML page within an x-up-notify message to the browser for action.



12. A system according to any preceding claim in which the apparatus comprises a mobile telephone.

13. A method of controlling an apparatus having a dedicated user interface from a browser, parts of the dedicated user interface communicating with each other using a dedicated user interface message protocol, the method comprising the steps of displaying a generic user interface on the browser; issuing requests from the browser due to user interaction and accepting notifications comprising data or events;

translating and communicating requests using the dedicated user interface message protocol to one of the parts of the dedicated user interface; and, receiving communications from the parts of the dedicated user interface using the dedicated user interface message protocol, translating the communications into notifications and passing them to the browser.

14. A method according to claim 13, further comprising the step of routing notifications and requests via a communications handler, wherein the communications handler determines the request type and if the request relates to World Wide Web browsing the communications handler transmits the request to a World Wide Web server, otherwise the communications handler passes the request to a translation system.

15. A method according to claim 13 or 14, further comprising the step of generating HDML pages in dependence on received x-up-notify messages and passing the HDML pages within x-up-notify messages to the browser for action.

16. A system as herein described with reference to the accompanying drawings.

17. A method as herein described with reference to the accompanying drawings.

18. A computer readable storage medium including a program of instructions encoding the system of any of claims 1 to 12.

5 19. A computer readable storage medium including a program of instructions encoding the method of any of claims 13 to 15.

**Abstract****APPARATUS CONTROL SYSTEM AND METHOD**

5 In a system for controlling an apparatus having a dedicated user interface, where parts of the dedicated user interface communicate with each other using a dedicated user interface message protocol, the system comprises a browser adapted to display a generic user interface, to issue requests due to user interaction with the generic user interface and to accept notifications  
10 comprising data or events. A translation system is configured to receive issued requests, to translate the requests and to communicate them using the dedicated user interface message protocol to one of the parts of the dedicated user interface, and to receive communications from the parts of the dedicated user interface using the dedicated user interface message protocol, to  
15 translate the communications into notifications and to pass them to the browser.

[Fig. 1]

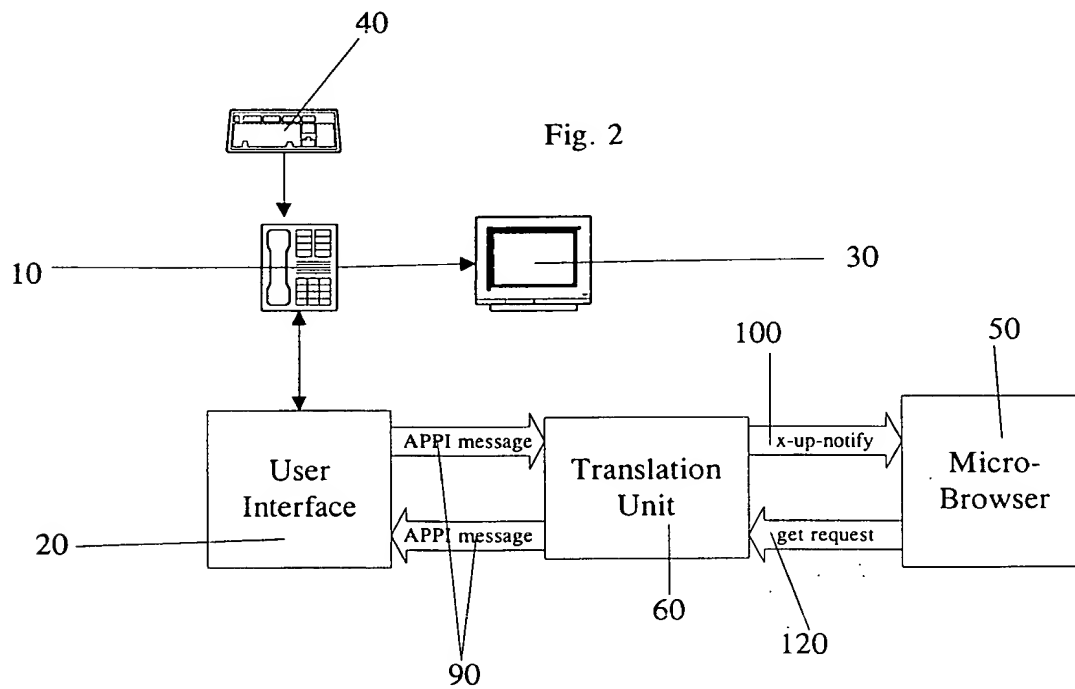
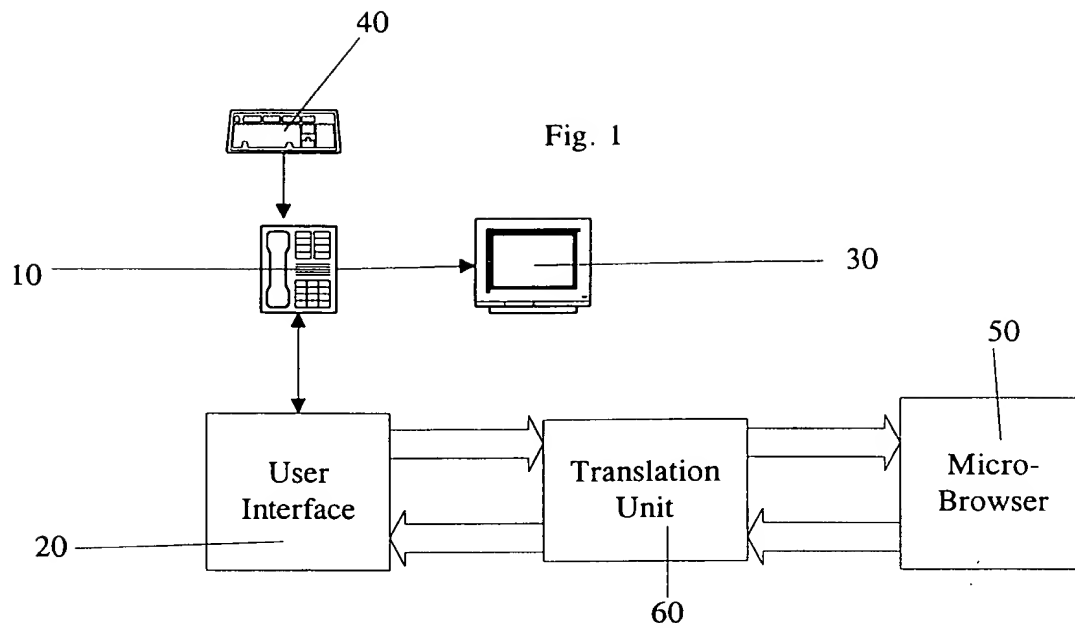
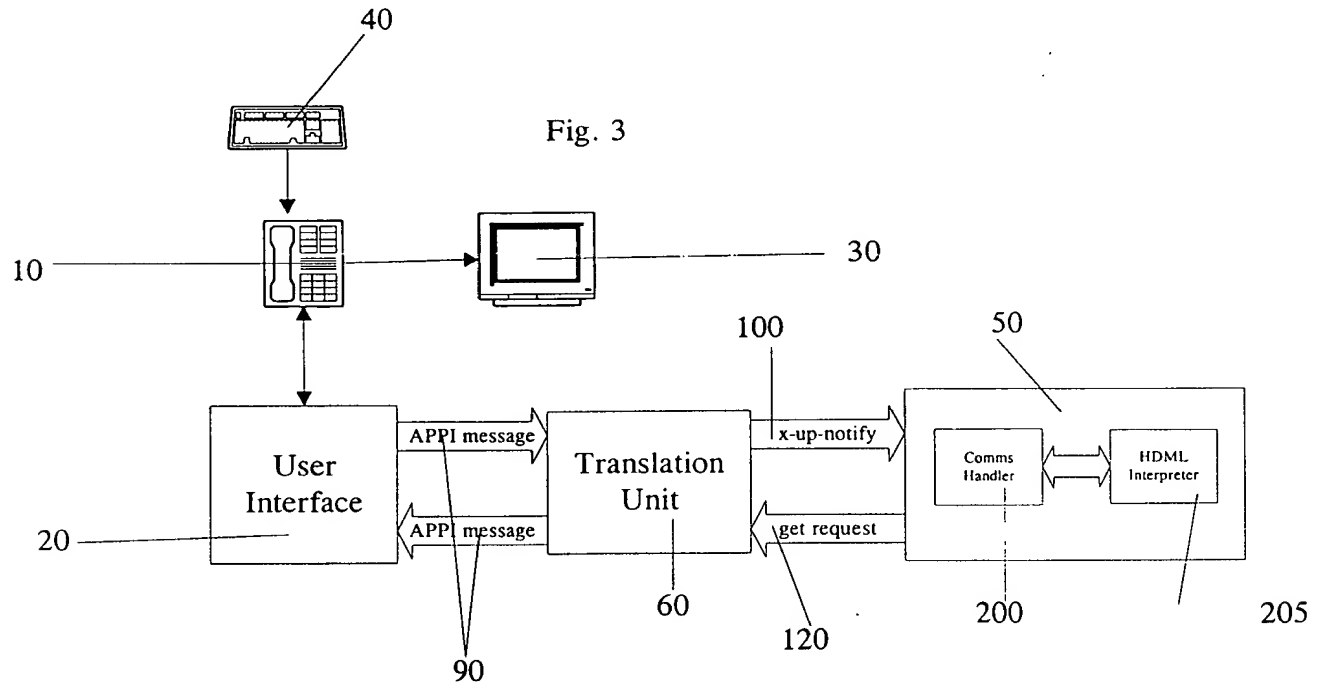


Fig. 4

Length	Orig. Address	Dest. Address	APPI Message
--------	---------------	---------------	--------------



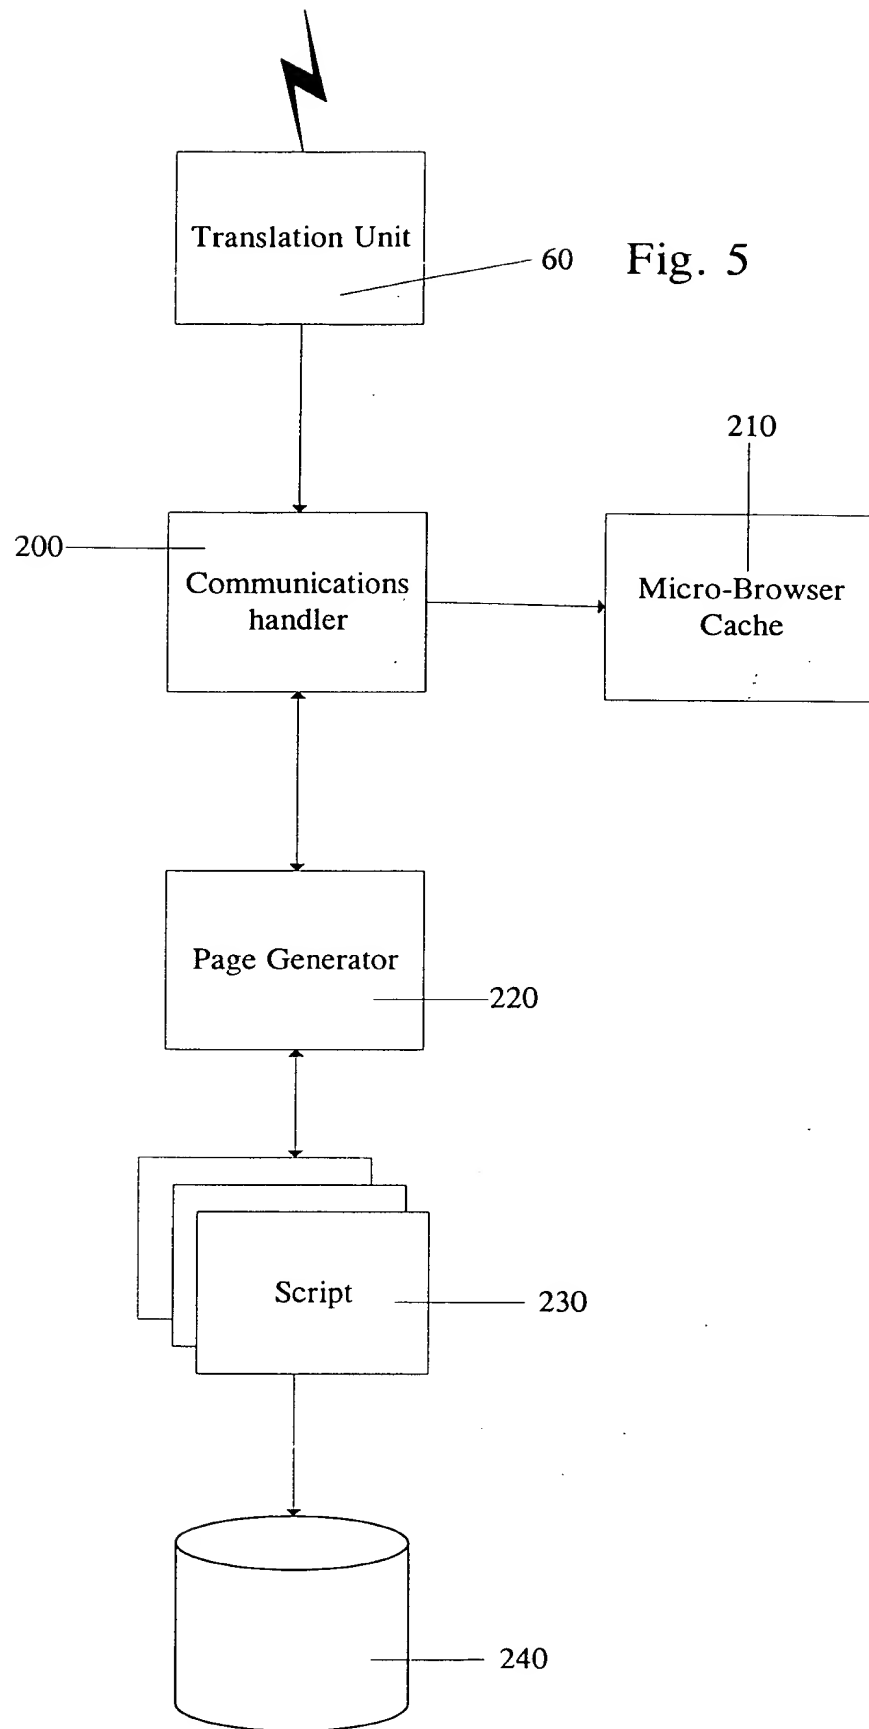


Fig. 5